

Aufbau: Polyurethan mit Stahlzugstrang
Construction: Polyurethane with steel wire cord

Type T5 – Teilung pitch 5 mm			Type T10 – Teilung pitch 10 mm			Type T20 – Teilung pitch 20 mm		
Artikel- Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth	Artikel- Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth	Artikel- Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth
T5/1500•	1500,00	300	T10/1500•	1500,00	150	T20/1500•	1500,00	75
T5/1600•	1600,00	320	T10/1600•	1600,00	160	T20/1600•	1600,00	80
T5/1700•	1700,00	340	T10/1700•	1700,00	170	T20/1700•	1700,00	85
T5/1800•	1800,00	360	T10/1800•	1800,00	180	T20/1800•	1800,00	90
T5/1900•	1900,00	380	T10/1900•	1900,00	190	T20/1900•	1900,00	95
T5/2000•	2000,00	400	T10/2000•	2000,00	200	T20/2000•	2000,00	100
T5/2100•	2100,00	420	T10/2100•	2100,00	210	T20/2100•	2100,00	105
T5/2200•	2200,00	440	T10/2200•	2200,00	220	T20/2200•	2200,00	110
T5/2300•	2300,00	460	T10/2300•	2300,00	230	T20/2300•	2300,00	115
T5/2400•	2400,00	480	T10/2400•	2400,00	240	T20/2400•	2400,00	120
T5/2500•	2500,00	500	T10/2500•	2500,00	250	T20/2500•	2500,00	125
T5/2600•	2600,00	520	T10/2600•	2600,00	260	T20/2600•	2600,00	130
T5/2700•	2700,00	540	T10/2700•	2700,00	270	T20/2700•	2700,00	135
T5/2800•	2800,00	560	T10/2800•	2800,00	280	T20/2800•	2800,00	140
T5/2900•	2900,00	580	T10/2900•	2900,00	290	T20/2900•	2900,00	145
T5/3000•	3000,00	600	T10/3000•	3000,00	300	T20/3000•	3000,00	150
T5/3200•	3200,00	640	T10/3200•	3200,00	320	T20/3200•	3200,00	160
T5/3400•	3400,00	680	T10/3400•	3400,00	340	T20/3400•	3400,00	170
T5/3600•	3600,00	720	T10/3600•	3600,00	360	T20/3600•	3600,00	180
T5/3800•	3800,00	760	T10/3800•	3800,00	380	T20/3800•	3800,00	190
T5/4000•	4000,00	800	T10/4000•	4000,00	400	T20/4000•	4000,00	200
T5/4200•	4200,00	840	T10/4200•	4200,00	420	T20/4200•	4200,00	210
T5/4400•	4400,00	880	T10/4400•	4400,00	440	T20/4400•	4400,00	220
T5/4600•	4600,00	920	T10/4600•	4600,00	460	T20/4600•	4600,00	230
T5/4800•	4800,00	960	T10/4800•	4800,00	480	T20/4800•	4800,00	240
T5/5000•	5000,00	1000	T10/5000•	5000,00	500	T20/5000•	5000,00	250
T5/5200•	5200,00	1040	T10/5200•	5200,00	520	T20/5200•	5200,00	260
T5/5400•	5400,00	1080	T10/5400•	5400,00	540	T20/5400•	5400,00	270
T5/5600•	5600,00	1120	T10/5600•	5600,00	560	T20/5600•	5600,00	280
T5/5800•	5800,00	1160	T10/5800•	5800,00	580	T20/5800•	5800,00	290
T5/6000•	6000,00	1200	T10/6000•	6000,00	600	T20/6000•	6000,00	300
T5/6200•	6200,00	1240	T10/6200•	6200,00	620	T20/6200•	6200,00	310
T5/6400•	6400,00	1280	T10/6400•	6400,00	640	T20/6400•	6400,00	320
T5/6600•	6600,00	1320	T10/6600•	6600,00	660	T20/6600•	6600,00	330
T5/6800•	6800,00	1360	T10/6800•	6800,00	680	T20/6800•	6800,00	340
T5/7000•	7000,00	1400	T10/7000•	7000,00	700	T20/7000•	7000,00	350

Optibelt ALPHAflex Zahnriemen sind auch mit PAZ-Gewebebeschichtung lieferbar.

Aufpreis: PAZ-Gewebe auf der Zahnseite

Längen: 1500 mm - 24 000 mm

Mindest-
abnahme: produktionsbedingt
(100 mm oder 150 mm)

Längen über 7000 mm auf Anfrage.

• Keine Lagerware.

Doppel-Zahnriemen
Profil DT5/DT10 – auf Anfrage.

Optibelt ALPHAflex timing belts are available with PAZ-fabric.

Surcharge: PAZ-fabric on tooth surface


Length: 1500 mm - 24 000 mm

Minimum
quantity: according to production capability
(100 mm or 150 mm)

Lengths over 7000 mm on request.


• Non stock items.

Double toothed timing belts
section DT5/DT10 – on request.

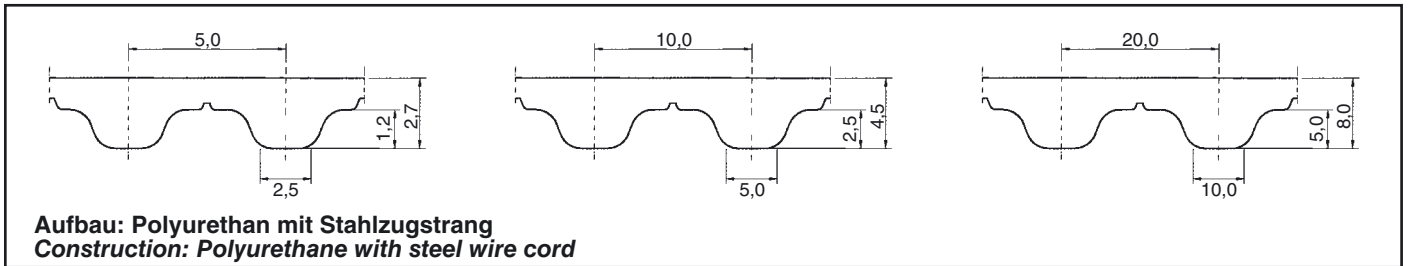

Type AT5 – Teilung pitch 5 mm			Type AT10 – Teilung pitch 10 mm			Type AT20 – Teilung pitch 20 mm		
Artikel-Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth	Artikel-Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth	Artikel-Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth
AT5/1500•	1500,00	300	AT10/1500•	1500,00	150	AT20/1500•	1500,00	75
AT5/1600•	1600,00	320	AT10/1600•	1600,00	160	AT20/1600•	1600,00	80
AT5/1700•	1700,00	340	AT10/1700•	1700,00	170	AT20/1700•	1700,00	85
AT5/1800•	1800,00	360	AT10/1800•	1800,00	180	AT20/1800•	1800,00	90
AT5/1900•	1900,00	380	AT10/1900•	1900,00	190	AT20/1900•	1900,00	95
AT5/2000•	2000,00	400	AT10/2000•	2000,00	200	AT20/2000•	2000,00	100
AT5/2100•	2100,00	420	AT10/2100•	2100,00	210	AT20/2100•	2100,00	105
AT5/2200•	2200,00	440	AT10/2200•	2200,00	220	AT20/2200•	2200,00	110
AT5/2300•	2300,00	460	AT10/2300•	2300,00	230	AT20/2300•	2300,00	115
AT5/2400•	2400,00	480	AT10/2400•	2400,00	240	AT20/2400•	2400,00	120
AT5/2500•	2500,00	500	AT10/2500•	2500,00	250	AT20/2500•	2500,00	125
AT5/2600•	2600,00	520	AT10/2600•	2600,00	260	AT20/2600•	2600,00	130
AT5/2700•	2700,00	540	AT10/2700•	2700,00	270	AT20/2700•	2700,00	135
AT5/2800•	2800,00	560	AT10/2800•	2800,00	280	AT20/2800•	2800,00	140
AT5/2900•	2900,00	580	AT10/2900•	2900,00	290	AT20/2900•	2900,00	145
AT5/3000•	3000,00	600	AT10/3000•	3000,00	300	AT20/3000•	3000,00	150
AT5/3200•	3200,00	640	AT10/3200•	3200,00	320	AT20/3200•	3200,00	160
AT5/3400•	3400,00	680	AT10/3400•	3400,00	340	AT20/3400•	3400,00	170
AT5/3600•	3600,00	720	AT10/3600•	3600,00	360	AT20/3600•	3600,00	180
AT5/3800•	3800,00	760	AT10/3800•	3800,00	380	AT20/3800•	3800,00	190
AT5/4000•	4000,00	800	AT10/4000•	4000,00	400	AT20/4000•	4000,00	200
AT5/4200•	4200,00	840	AT10/4200•	4200,00	420	AT20/4200•	4200,00	210
AT5/4400•	4400,00	880	AT10/4400•	4400,00	440	AT20/4400•	4400,00	220
AT5/4600•	4600,00	920	AT10/4600•	4600,00	460	AT20/4600•	4600,00	230
AT5/4800•	4800,00	960	AT10/4800•	4800,00	480	AT20/4800•	4800,00	240
AT5/5000•	5000,00	1000	AT10/5000•	5000,00	500	AT20/5000•	5000,00	250
AT5/5200•	5200,00	1040	AT10/5200•	5200,00	520	AT20/5200•	5200,00	260
AT5/5400•	5400,00	1080	AT10/5400•	5400,00	540	AT20/5400•	5400,00	270
AT5/5600•	5600,00	1120	AT10/5600•	5600,00	560	AT20/5600•	5600,00	280
AT5/5800•	5800,00	1160	AT10/5800•	5800,00	580	AT20/5800•	5800,00	290
AT5/6000•	6000,00	1200	AT10/6000•	6000,00	600	AT20/6000•	6000,00	300
AT5/6200•	6200,00	1240	AT10/6200•	6200,00	620	AT20/6200•	6200,00	310
AT5/6400•	6400,00	1280	AT10/6400•	6400,00	640	AT20/6400•	6400,00	320
AT5/6600•	6600,00	1320	AT10/6600•	6600,00	660	AT20/6600•	6600,00	330
AT5/6800•	6800,00	1360	AT10/6800•	6800,00	680	AT20/6800•	6800,00	340
AT5/7000•	7000,00	1400	AT10/7000•	7000,00	700	AT20/7000•	7000,00	350

<p>Optibelt ALPHAflex Zahnriemen sind auch mit PAZ-Gewebebeschichtung lieferbar.</p> <p>Aufpreis: PAZ-Gewebe auf der Zahnseite</p> <p>Längen: 1500 mm - 24 000 mm</p> <p>Mindestabnahme: produktionsbedingt (100 mm oder 150 mm)</p> <p>Längen über 7000 mm auf Anfrage.</p> <ul style="list-style-type: none"> Keine Lagerware. <p>Doppel-Zahnriemen Profil DAT5/DAT10 – auf Anfrage.</p>	<p>Optibelt ALPHAflex timing belts are available with PAZ-fabric.</p> <p>Surcharge: PAZ-fabric on tooth surface</p> <p>Length: 1500 mm - 24 000 mm</p> <p>Minimum quantity: according to production capability (100 mm or 150 mm)</p> <p>Lengths over 7000 mm on request.</p> <ul style="list-style-type: none"> Non stock items. <p>Double toothed timing belts section DAT5/DAT10 – on request.</p>
--	---

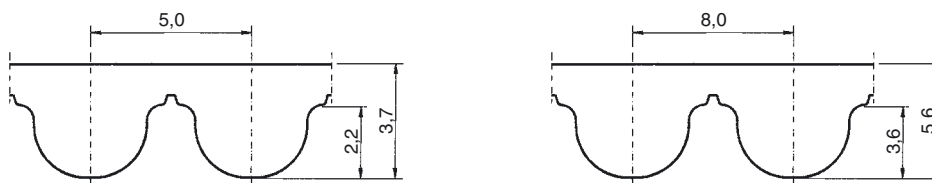

Aufbau: Polyurethan mit Stahlzugstrang
Construction: Polyurethane with steel wire cord

Type 5M – Teilung <i>pitch</i> 5 mm			Type 8M – Teilung <i>pitch</i> 8 mm		
Artikel- Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth	Artikel- Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth
5M/1500●	1500,00	300	8M/1504●	1504,00	188
5M/1600●	1600,00	320	8M/1600●	1600,00	200
5M/1700●	1700,00	340	8M/1704●	1704,00	213
5M/1800●	1800,00	360	8M/1800●	1800,00	225
5M/1900●	1900,00	380	8M/1904●	1904,00	238
5M/2000●	2000,00	400	8M/2000●	2000,00	250
5M/2100●	2100,00	420	8M/2104●	2104,00	263
5M/2200●	2200,00	440	8M/2200●	2200,00	275
5M/2300●	2300,00	460	8M/2304●	2304,00	288
5M/2400●	2400,00	480	8M/2400●	2400,00	300
5M/2500●	2500,00	500	8M/2504●	2504,00	313
5M/2600●	2600,00	520	8M/2600●	2600,00	325
5M/2700●	2700,00	540	8M/2704●	2704,00	338
5M/2800●	2800,00	560	8M/2800●	2800,00	350
5M/2900●	2900,00	580	8M/2904●	2904,00	363
5M/3000●	3000,00	600	8M/3000●	3000,00	375
5M/3200●	3200,00	640	8M/3200●	3200,00	400
5M/3400●	3400,00	680	8M/3400●	3400,00	425
5M/3600●	3600,00	720	8M/3600●	3600,00	450
5M/3800●	3800,00	760	8M/3800●	3800,00	475
5M/4000●	4000,00	800	8M/4000●	4000,00	500
5M/4200●	4200,00	840	8M/4200●	4200,00	525
5M/4400●	4400,00	880	8M/4400●	4400,00	550
5M/4600●	4600,00	920	8M/4600●	4600,00	575
5M/4800●	4800,00	960	8M/4800●	4800,00	600
5M/5000●	5000,00	1000	8M/5000●	5000,00	625
5M/5200●	5200,00	1040	8M/5200●	5200,00	650
5M/5400●	5400,00	1080	8M/5400●	5400,00	675
5M/5600●	5600,00	1120	8M/5600●	5600,00	700
5M/5800●	5800,00	1160	8M/5800●	5800,00	725
5M/6000●	6000,00	1200	8M/6000●	6000,00	750
5M/6200●	6200,00	1240	8M/6200●	6200,00	775
5M/6400●	6400,00	1280	8M/6400●	6400,00	800
5M/6600●	6600,00	1320	8M/6600●	6600,00	825
5M/6800●	6800,00	1360	8M/6800●	6800,00	850
5M/7000●	7000,00	1400	8M/7000●	7000,00	875

Optibelt ALPHAflex Zahnriemen sind auch mit PAZ-Gewebebeschichtung lieferbar.

Aufpreis: PAZ-Gewebe auf der Zahnseite

Längen: 1500 mm - 24 000 mm

Mindest-
abnahme: produktionsbedingt
(100 mm oder 150 mm)

Längen über 7000 mm auf Anfrage.

• Keine Lagerware.

Doppel-Zahnriemen Profil D5M – auf Anfrage.

Optibelt ALPHAflex timing belts are available with PAZ-fabric.

Surcharge: PAZ-fabric on tooth surface


Length: 1500 mm - 24 000 mm

Minimum
quantity: according to production capability
(100 mm or 150 mm)

Lengths over 7000 mm on request.

• Non stock items.

Double toothed timing belts section D5M – on request.

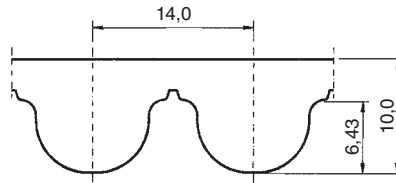

Aufbau: Polyurethan mit Stahlzugstrang
Construction: Polyurethane with steel wire cord

Type 14M – Teilung pitch 14 mm

Artikel- Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth	Artikel- Bezeichnung Designation	Wirklänge Pitch length (mm)	Anzahl der Zähne Number of teeth
14M/1512●	1512,00	108	14M/4550●	4550,00	325
14M/1596●	1596,00	114	14M/4606●	4606,00	329
14M/1694●	1694,00	121	14M/4704●	4704,00	336
14M/1750●	1750,00	125	14M/4802●	4802,00	343
14M/1806●	1806,00	129	14M/4900●	4900,00	350
14M/1904●	1904,00	136	14M/4998●	4998,00	357
14M/2002●	2002,00	143	14M/5096●	5096,00	364
14M/2100●	2100,00	150	14M/5194●	5194,00	371
14M/2198●	2198,00	157	14M/5250●	5250,00	375
14M/2296●	2296,00	164	14M/5306●	5306,00	379
14M/2394●	2394,00	171	14M/5404●	5404,00	386
14M/2450●	2450,00	175	14M/5502●	5502,00	393
14M/2506●	2506,00	179	14M/5600●	5600,00	400
14M/2604●	2604,00	186	14M/5698●	5698,00	407
14M/2702●	2702,00	193	14M/5796●	5796,00	414
14M/2800●	2800,00	200	14M/5894●	5894,00	421
14M/2898●	2898,00	207	14M/5950●	5950,00	425
14M/2996●	2996,00	214	14M/6006●	6006,00	429
14M/3094●	3094,00	221	14M/6104●	6104,00	436
14M/3150●	3150,00	225	14M/6202●	6202,00	443
14M/3206●	3206,00	229	14M/6300●	6300,00	450
14M/3304●	3304,00	236	14M/6398●	6398,00	457
14M/3402●	3402,00	243	14M/6496●	6496,00	464
14M/3500●	3500,00	250	14M/6594●	6594,00	471
14M/3598●	3598,00	257	14M/6650●	6650,00	475
14M/3696●	3696,00	264	14M/6706●	6706,00	479
14M/3794●	3794,00	271	14M/6804●	6804,00	486
14M/3850●	3850,00	275	14M/6902●	6902,00	493
14M/3906●	3906,00	279	14M/7000●	7000,00	500
14M/4004●	4004,00	286			
14M/4102●	4102,00	293			
14M/4200●	4200,00	300			
14M/4298●	4298,00	307			
14M/4396●	4396,00	314			
14M/4494●	4494,00	321			

Optibelt ALPHAflex Zahnriemen sind auch mit PAZ-Gewebebeschichtung lieferbar.

Aufpreis: PAZ-Gewebe auf der Zahnseite

Längen: 1512 mm - 24 000 mm

Mindest-
abnahme: produktionsbedingt
(100 mm oder 150 mm)

Längen über 7000 mm auf Anfrage.

- Keine Lagerware.

Optibelt ALPHAflex timing belts are available with PAZ-fabric.

Surcharge: PAZ-fabric on tooth surface

Length: 1512 mm - 24 000 mm

Minimum
quantity: according to production capability
(100 mm or 150 mm)

Lengths over 7000 mm on request.

- Non stock items.