


optibelt *OMEGA FanPower*

The requirements placed upon fan drives in the oil industry are high. The following product characteristics are expected: long service life, maintenance-free, high level of power transmission and antistatic behaviour in accordance with ISO 9563, non-sensitive to external influences such as temperature deviation and moisture.

The special tooth form and the use of particularly resistant materials ensure that the Optibelt OMEGA FanPower fulfils these fan drive requirements without compromise.

Advantages and standard characteristics

- high efficiency
- maintenance-free
- audibly lower noise level
- wear-resistant
- long service life
- can be used in HTD® and RPP® timing belts
- antistatic in accordance with ISO 9563 with certificate

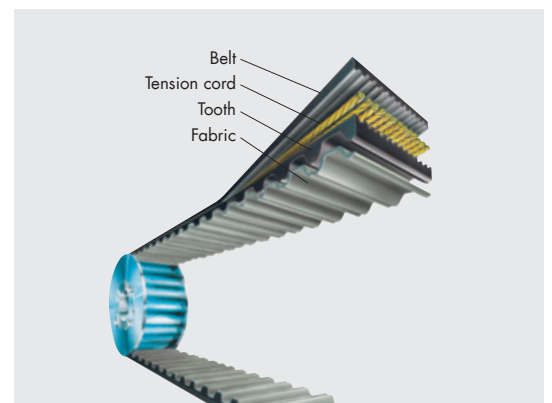

Range:

2000 8MFP	Standard width:
2600 8MFP	50, 85
2800 8MFP	

3150 14MFP	Standard width:
3360 14MFP	55, 85
3500 14MFP	
3850 14MFP	
4326 14MFP	
4578 14MFP	

Further sizes on request

Timing pulleys:

HTD® or RPP®