

Polyethylene wear strip






Polyethylene

WEAR STRIP

Material:



Extruded ultra high molecular weight polyethylene.
Max. continuous service temperature in air 90° C.
Water absorption coefficient = 0.

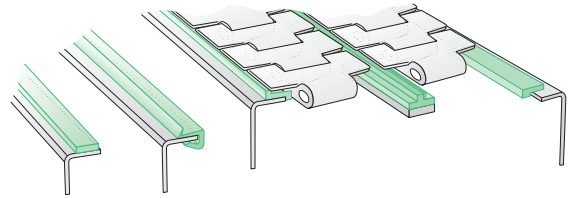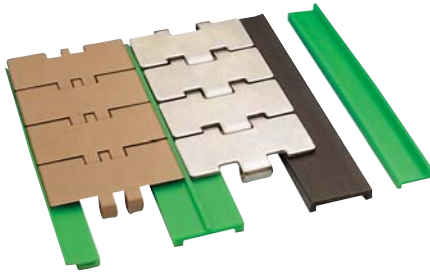

WEAR STRIP

Supply: coils.
Packaging: 60 meters.



Code	Colour
19001N	Black
19001V	Green

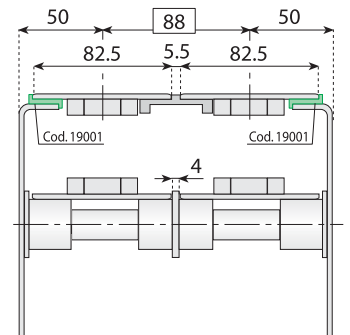

WEAR STRIP

Supply: coils.
Packaging: 60 meters.

Code	Colour
19005N	Black
19005V	Green

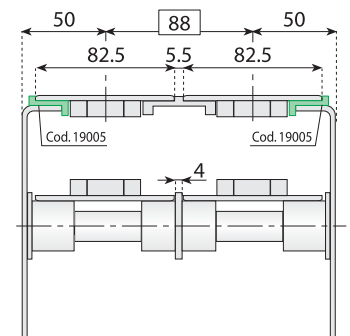


WEAR STRIP

Supply: coils.
Packaging: 60 meters.
Notes: applicable from 2.5 to 4 mm thick sheet metal.

Code	Colour
19007N	Black
19007V	Green



New design

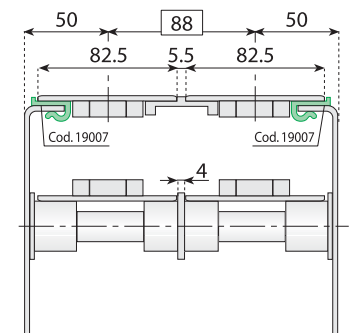

Polyethylene wear strip






Polyethylene


WEAR STRIP

Material:

Extruded ultra high molecular weight polyethylene.
Max. continuous service temperature in air 90° C.
Water absorption coefficient = 0.

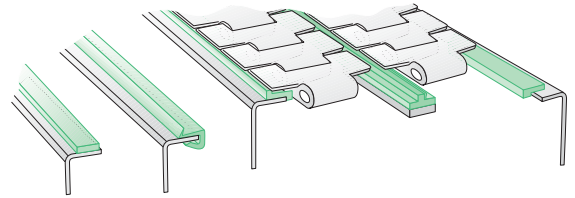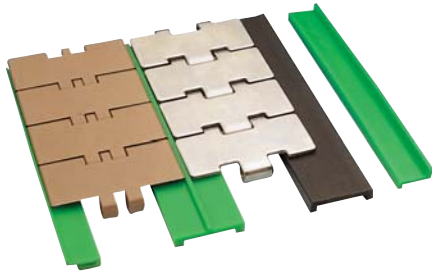

New design





WEAR STRIP

Supply: coils.

Packaging: 60 meters.

Notes: applicable from 2.5 to 4 mm thick sheet metal.

Code	Colour
19003N	Black
19003V	Green





WEAR STRIP

Supply: 6 m bars.

Packaging: 60 meters.

Code	Colour
19091N	Black
19091V	Green



WEAR STRIP

Supply: coils.

Packaging: 60 meters.




Code	Colour
19004N	Black
19004V	Green

Polyethylene wear strip

WEAR STRIP

Material:

Extruded ultra high molecular weight polyethylene.
 Max. continuous service temperature in air 90° C.
 Water absorption coefficient = 0.

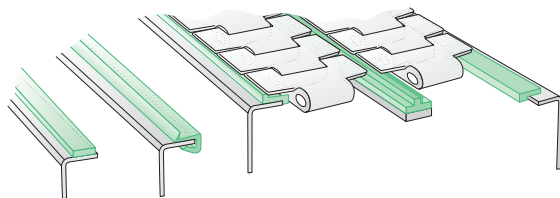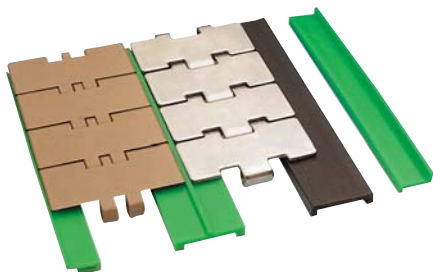



WEAR STRIP

Supply: coils.


Packaging: 60 meters.

Notes: use for spacer code 14349.

Code	Colour
19067N	Black
19067V	Green




Code	Colour	L x H mm
19008N	Black	20 x 3
19008V	Green	20 x 3
19009N	Black	20 x 5
19009V	Green	20 x 5
19010N	Black	25 x 3
19010V	Green	25 x 3
19011N	Black	30 x 3
19011V	Green	30 x 3
19012N	Black	40 x 3
19012V	Green	40 x 3
19013N	Black	50 x 3
19013V	Green	50 x 3
19014SN	Black	60 x 3
19014SV	Green	60 x 3
19014N	Black	70 x 3
19014V	Green	70 x 3




WEAR STRIP

Supply: coils.

Packaging: 60 meters.

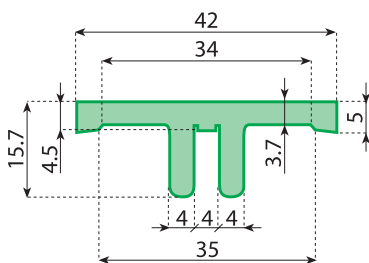

Code	Colour
19093N	Black
19093V	Green
19093B	White

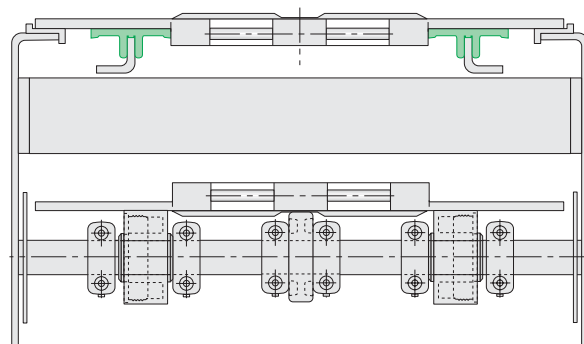

WEAR STRIP

Supply: 3 m. bars.





Packaging: 30 meters.

Chain guide wear strip

WEAR STRIP

Material:



Extruded ultra high molecular weight polyethylene.
 Max. continuous service temperature in air 90° C.
 Water absorption coefficient = 0.

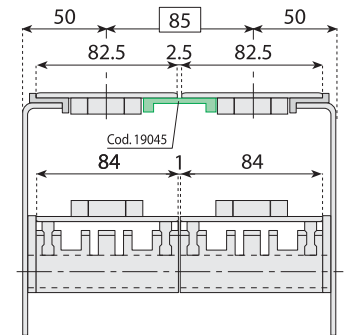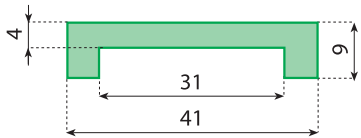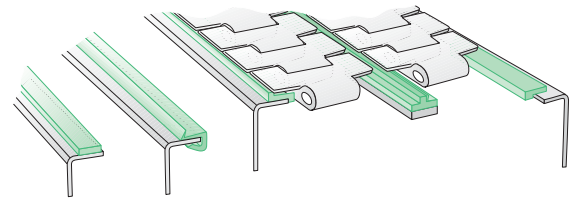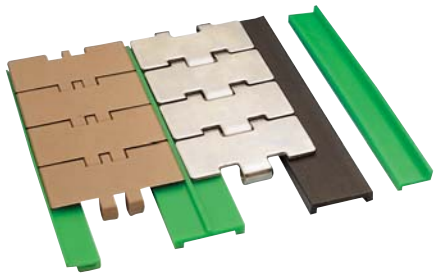

WEAR STRIP

Supply: 6 m. bars.
Packaging: 30 meters.



Code	Colour
19045N	Black
19045V	Green

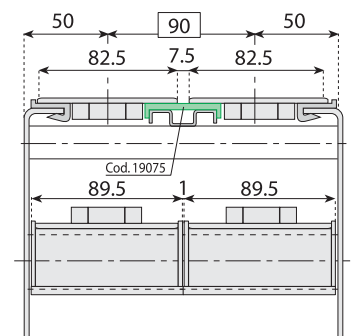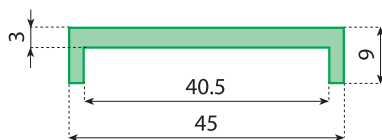

WEAR STRIP

Supply: 6 m. bars.
Packaging: 30 meters.

Code	Colour
19075N	Black
19075V	Green

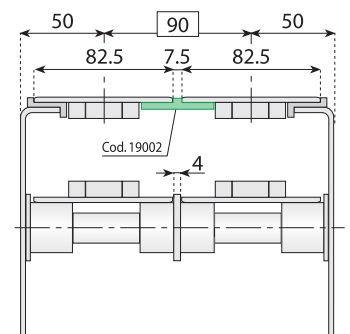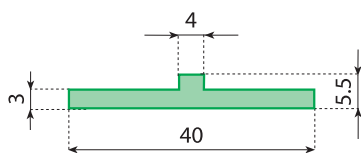

WEAR STRIP

Supply: coils.
Packaging: 60 meters.

Code	Colour
19002N	Black
19002V	Green

Polyethylene wear strip





WEAR STRIP

Material:

Extruded ultra high molecular weight polyethylene.
 Max. continuous service temperature in air 90° C.
 Water absorption coefficient = 0.





Polyethylene

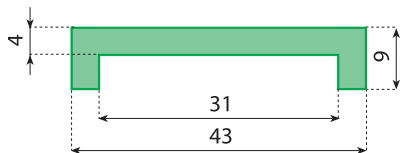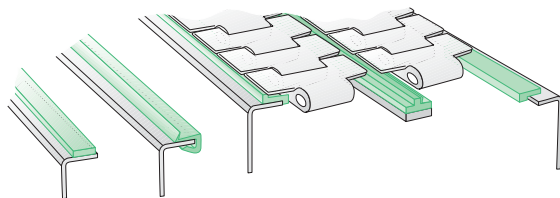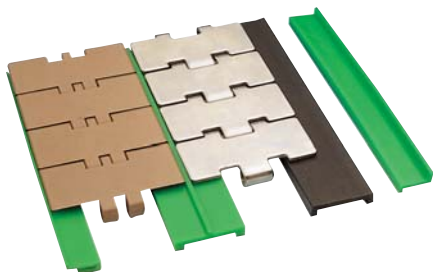

WEAR STRIP

Supply: coils.
 Packaging: 60 meters.



Code	Colour
19006LN	Black
19006VN	Green

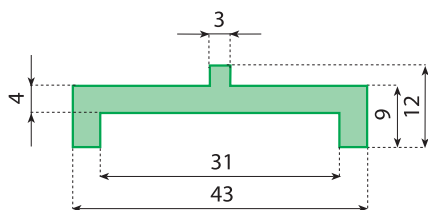

WEAR STRIP

Supply: coils.
 Packaging: 60 meters.

Code	Colour
19006N	Black
19006V	Green

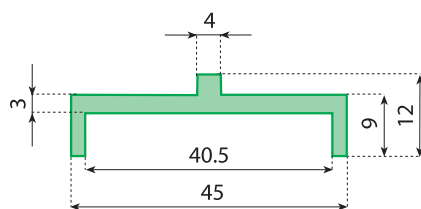


WEAR STRIP

Supply: 6 m. bars.
 Packaging: 30 meters.

Code	Colour
19076N	Black
19076V	Green

Chain guide wear strip

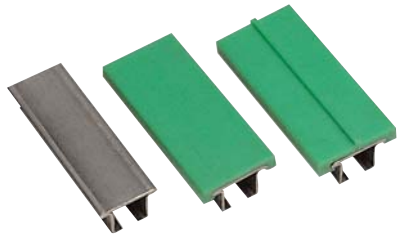

WEAR STRIP

Material:


Extruded ultra high molecular weight polyethylene.
Max. continuous service temperature in air 90° C.
Water absorption coefficient = 0.



Polyethylene



Polyethylene antistatic

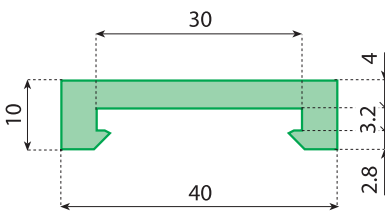



WEAR STRIP

Supply: 3 or 6 meters.

Packaging: 30 meters.

Notes: this profile can be used in combination with steel profile code 19048 - 19048K.

Code	Colour	Length	Weight Kg/m
19071C	Black	3 m	0.20
19071	Black	6 m	0.20
19070C	Green	3 m	0.20
19070	Green	6 m	0.20
19070BC	White	3 m	0.20
19070B	White	6 m	0.20
19071ASC	Antistatic black	3 m	0.20
19071AS	Antistatic black	6 m	0.20

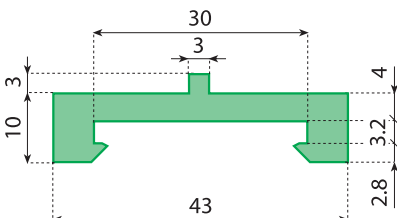



WEAR STRIP

Supply: 3 or 6 meters.

Packaging: 30 meters.

Notes: this profile can be used in combination with steel profile code 19048 - 19048K.

Code	Colour	Length	Weight Kg/m
19073C	Black	3 m	0.20
19073	Black	6 m	0.20
19072C	Green	3 m	0.20
19072	Green	6 m	0.20
19072BC	White	3 m	0.20
19072B	White	6 m	0.20
19073ASC	Antistatic black	3 m	0.20
19073AS	Antistatic black	6 m	0.20

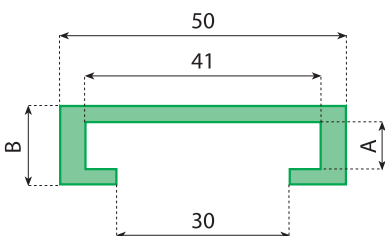


WEAR STRIP


Supply: 3 or 6 meters.

Packaging: 30 meters.

Code	Colour	A	B	Length	Weight Kg/m
19080N	Black	6.5	12	3 m	0.23
19080NL	Black	6.5	12	6 m	0.23
19080V	Green	6.5	12	3 m	0.23
19080VL	Green	6.5	12	6 m	0.23
19053N	Black	8.5	14	3 m	0.25
19053NL	Black	8.5	14	6 m	0.25
19053V	Green	8.5	14	3 m	0.25
19053VL	Green	8.5	14	6 m	0.25
19081N	Black	10.5	16	3 m	0.27
19081NL	Black	10.5	16	6 m	0.27
19081V	Green	10.5	16	3 m	0.27
19081VL	Green	10.5	16	6 m	0.27

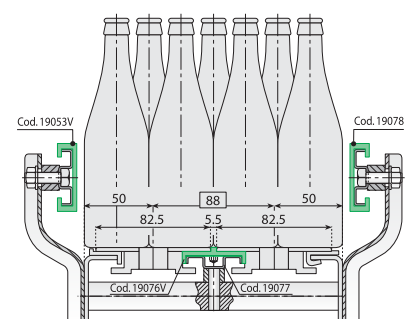

Chain guide wear strip

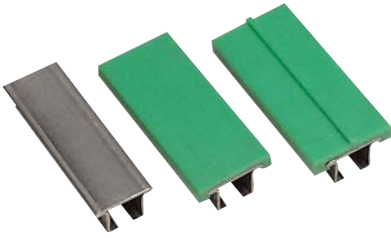

CHAIN GUIDE WEAR STRIP

Material:

- Metal profile in stainless steel AISI 304.
- Wear strip in UHMWPE.

Characteristics:

- Very low friction coefficient.
- High resistance to chemical agents.
- No liquid absorption.

Supply:

- 3 or 6 meters.
- Steel profile and wear strip are supplied assembled.

Application:

- As chain guide.
- As side guide.



Polyethylene




Polyethylene antistatic



304 Stainless steel



Accessories




STAINLESS STEEL PROFILE

Supply: 3 or 6 meters.
Packaging: 30 meters.



Code	Length	Weight Kg/m
19048C	3 m	0.90
19048	6 m	0.90

These profiles are applicable to code 19048 - 19048C

cod. 19070 - 19071





cod. 19072 - 19073

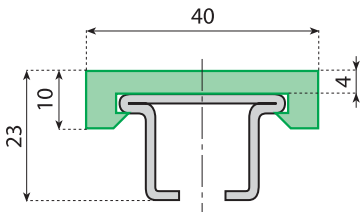

CHAIN GUIDE WEAR STRIP

Supply: 3 or 6 meters.
Packaging: 30 meters.
Notes: the stainless steel profile and wear strip are supplied assembled.


Code	Colour	Length	Weight Kg/m
19063NC	Black	3 m	1.10
19063N	Black	6 m	1.10
19063VC	Green	3 m	1.10
19063V	Green	6 m	1.10
19063BC	White	3 m	1.10
19063B	White	6 m	1.10
19063ASC	Antistatic black	3 m	1.10
19063AS	Antistatic black	6 m	1.10

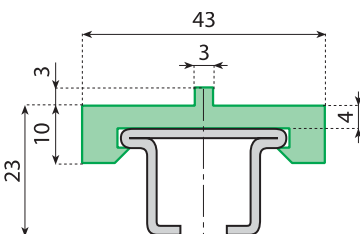

CHAIN GUIDE WEAR STRIP

Supply: 3 or 6 meters.
Packaging: 30 meters.
Notes: the stainless steel profile and wear strip are supplied assembled.


Code	Colour	Length	Weight Kg/m
19064NC	Black	3 m	1.10
19064N	Black	6 m	1.10
19064VC	Green	3 m	1.10
19064V	Green	6 m	1.10
19064BC	White	3 m	1.10
19064B	White	6 m	1.10
19064ASC	Antistatic black	3 m	1.10
19064AS	Antistatic black	6 m	1.10



Chain guide wear strip

ASSEMBLY


Notes: steel profile and wear strip can be assembled by using a rubber hammer.

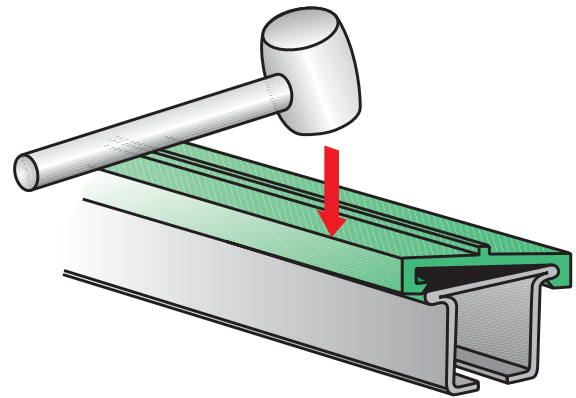

THERMAL EXPANSION


Notes:

- Coefficient of linear expansion of wear strip between + 20° C and + 120° C = $2 \times 10^{-4} \text{ mm/}^\circ\text{C}$.
- Max. continuous service temperature in air: 90° C.
- Water absorption = 0.

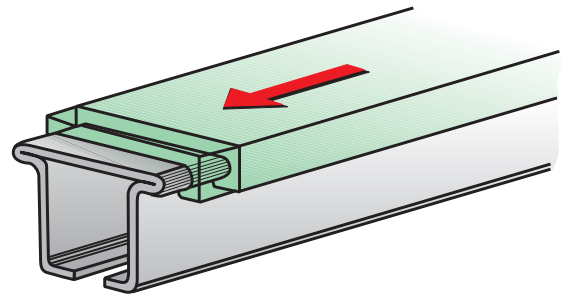


FIXING

Notes: rapid wear strip assembly with M6 or M8 screws.

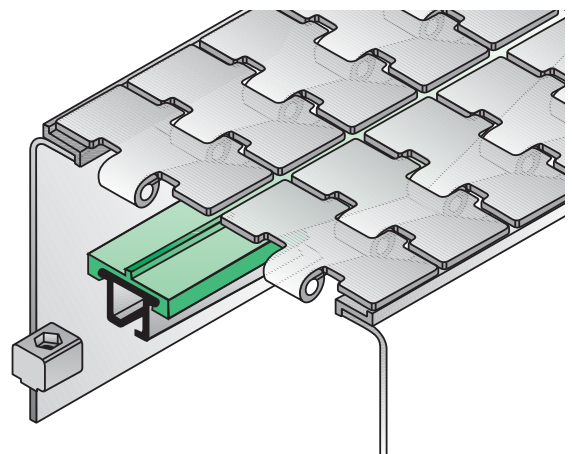

SIDE GUIDE

Application: the profile can be used on several conveyors as a side guide or as a chains support in combination with standard UHMWPE guides or wear strip.


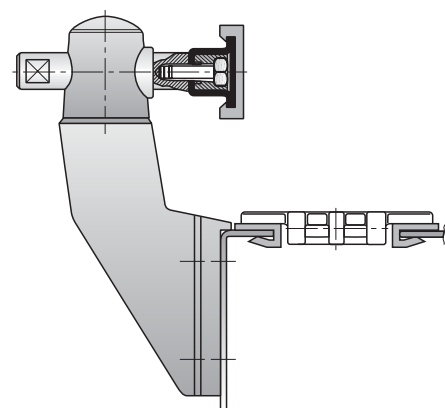


Chain guide wear strip (accessories)



Reinforced polyamide

New design

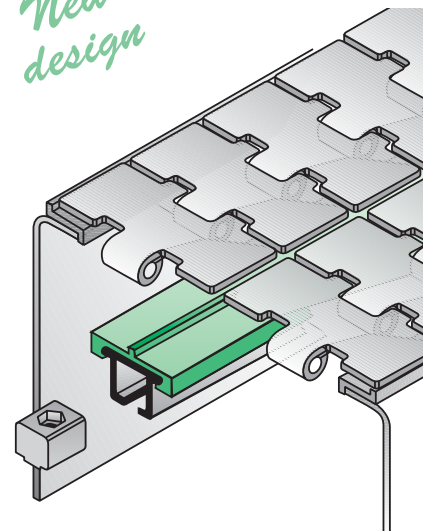

FIXING CLAMP


Material: reinforced polyamide.

Packaging: 100 pieces.

Application: rapid wear strip assembly with M6 or M8 screws.

Notes: screws are not included.

Code	A mm	B mm	C mm	Screws
14108	10	6.2	4.5	M6
14109	13	8.2	6	M8

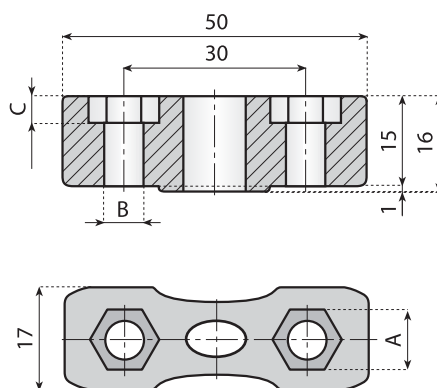

CONNECTING ELEMENT


Material: reinforced polyamide.

Packaging: 100 pieces.

Notes: screws are not included.

Code	A mm	B mm	C mm	Screws
14075	10	6.2	4.5	M6
14111	13	8.2	6	M8

New design

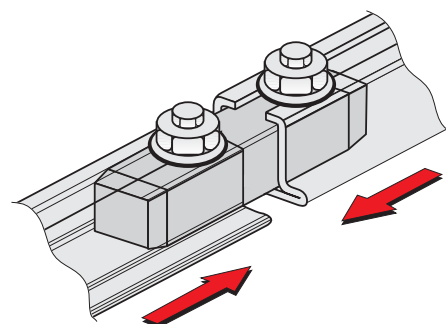

Wear strip shoe for steel profile



WEAR STRIP SHOE

Application: shoes are used to help chain guide between idler wheels and wear strip and must be fixed with M6 screws.




Polyamide



Accessories

New design

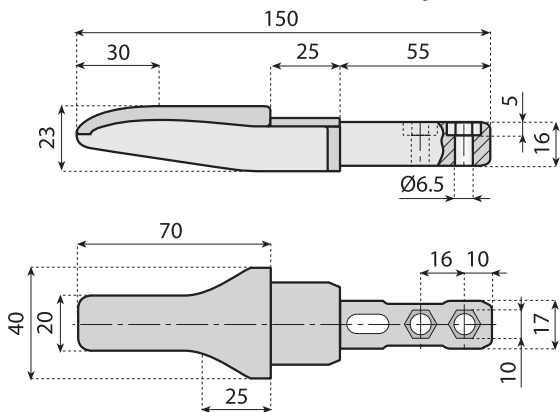

WEAR STRIP SHOE

Material: polyamide.





Packaging: 50 pieces.

Application: with chain L 82,5 - K325.

Code	Colour
14090	Black
14090V	Green



APPLICATION EXAMPLE

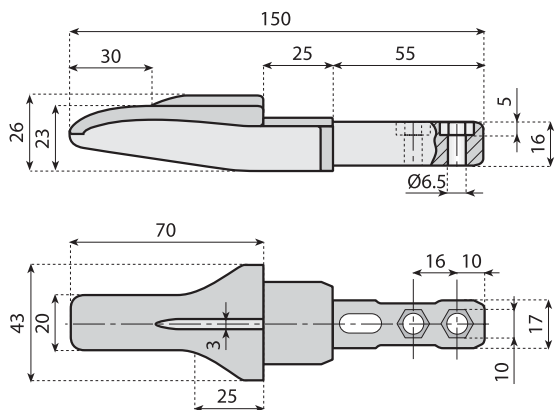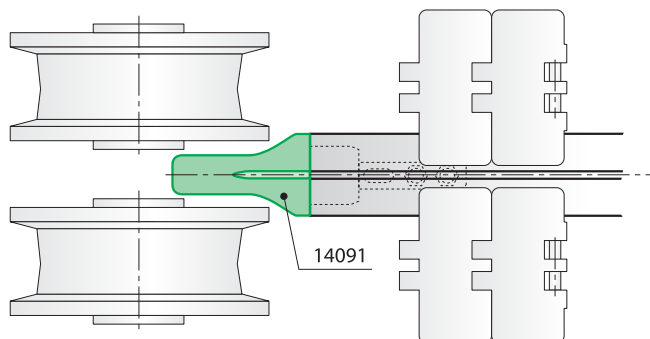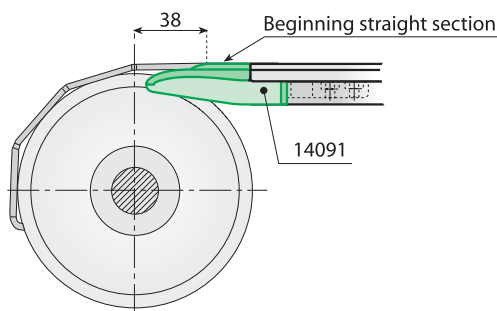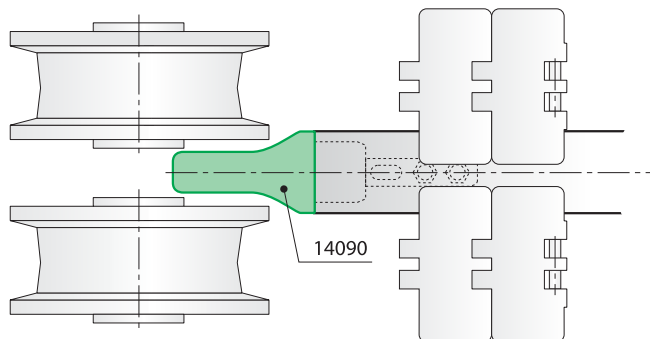

WEAR STRIP SHOE

Material: polyamide.

Packaging: 50 pieces.

Application: with chain L 82,5 - K325 pitch P = 88 mm.

Code	Colour
14091	Black
14091V	Green

Wear strip shoe for steel profile



WEAR STRIP SHOE


Application: shoes are used to help chain guide between idler wheels and wear strip and must be fixed with M6 screws.



Polyamide



Accessories

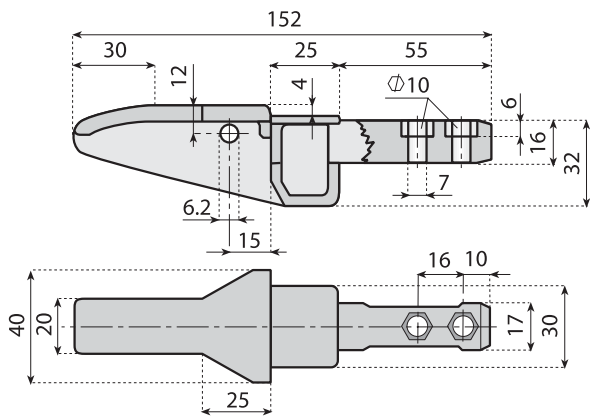

Heavy Duty




WEAR STRIP SHOE

Material: polyamide.




Packaging: 50 pieces.

Application: with chain L 82,5 - K325.

Code	Colour
14110	Black
14110V	Green

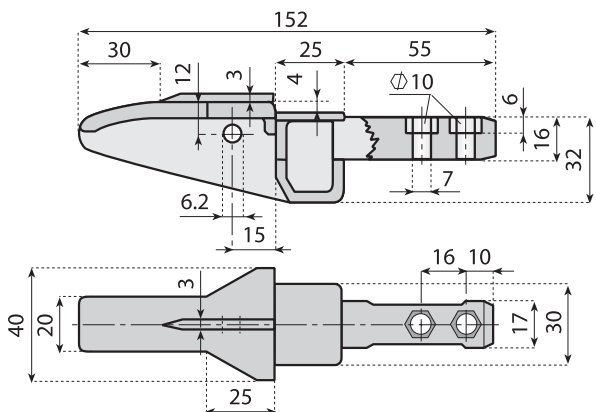

APPLICATION EXAMPLE

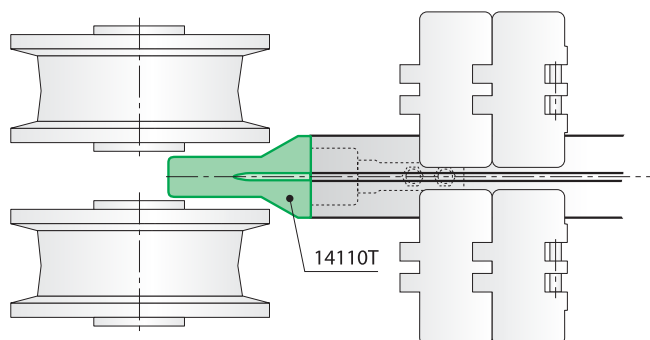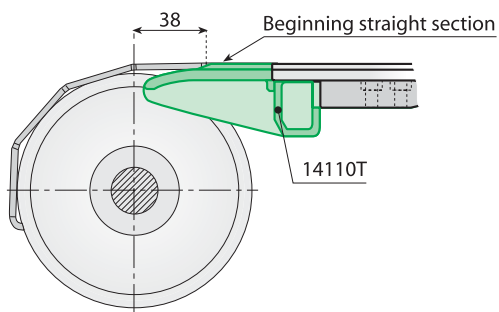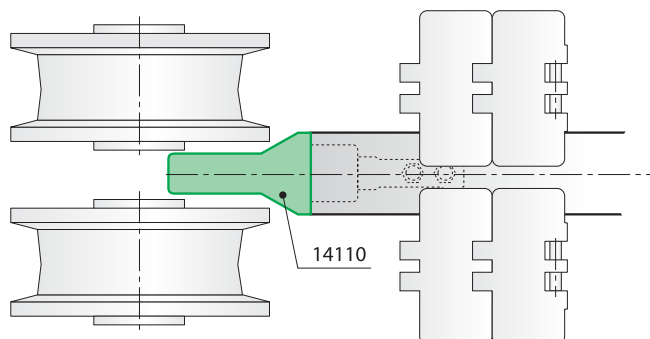

WEAR STRIP SHOE


Material: polyamide.

Packaging: 50 pieces.

Application: with chain L 82,5 - K325 pitch P = 88 mm.

Code	Colour
14110T	Black
14110TV	Green

Chain guide wear strip (accessories)





PROTECTION TAPE

Material: rubber.
Packaging: 30 meters.
Application: protection of steel profile against infiltration of liquids and dust.

Code

19049

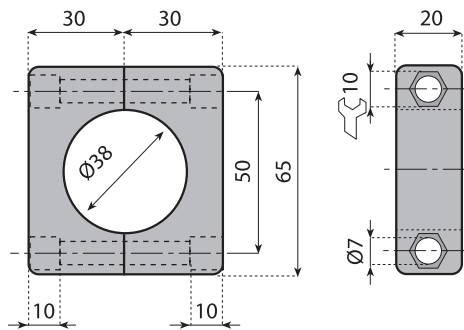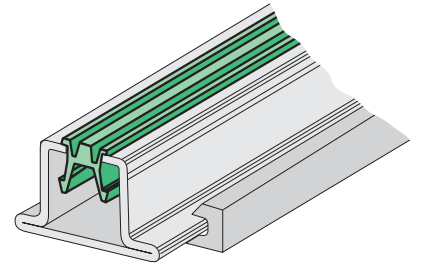


WEAR STRIP CLAMP


Material: reinforced polyamide.
Packaging: 50 pieces.
Application: support of wear strip.
Notes: screws are not included.

Code

14347

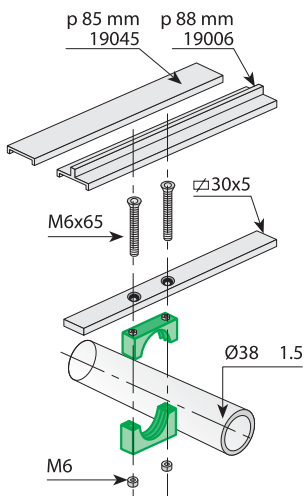

APPLICATION EXAMPLE

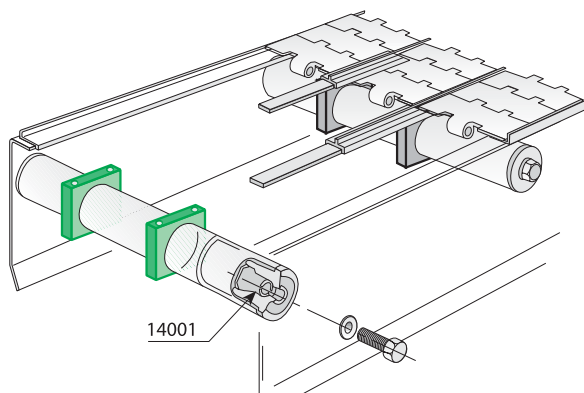

Chain guide wear strip



CHAIN GUIDE WEAR STRIPS

Material:

- Metal profile in anodized aluminium.
- Wear strip in UHMWPE.

Characteristics:

- Very low friction coefficient.
- Moderate resistance to chemical agents.
- No liquid absorption.

Supply:

- 3 or 6 meters.
- Metal profile and wear strip are supplied assembled.

Application:

- As chain guide (carry and return).
- As side guide.



Polyethylene




Polyethylene antistatic



Anodized aluminium




Accessories



ALUMINIUM PROFILE

Supply: 3 or 6 meters.

Packaging: 30 meters.

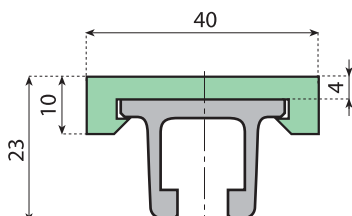


CHAIN GUIDE WEAR STRIP

Supply: 3 or 6 meters.

Packaging: 30 meters.

Notes: the aluminium profile and wear strip are supplied assembled.

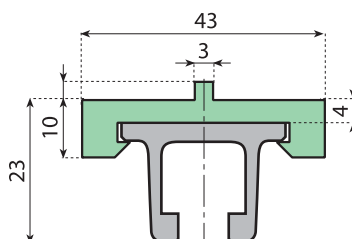

CHAIN GUIDE WEAR STRIP

Supply: 3 or 6 meters.

Packaging: 30 meters.

Notes: the aluminium profile and wear strip are supplied assembled.


Code	Length	Weight Kg/m
19097L	3 m	0.50
19097	6 m	0.50

Code	Colour	Length	Weight Kg/m
19098N	Black	3 m	0.68
19098NL	Black	6 m	0.68
19098V	Green	3 m	0.68
19098VL	Green	6 m	0.68
19098B	White	3 m	0.68
19098BL	White	6 m	0.68
19098AS	Antistatic black	3 m	0.68
19098ASL	Antistatic black	6 m	0.68




Code	Colour	Length	Weight Kg/m
19119N	Black	3 m	0.70
19119NL	Black	6 m	0.70
19119V	Green	3 m	0.70
19119VL	Green	6 m	0.70
19119B	White	3 m	0.70
19119BL	White	6 m	0.70
19119AS	Antistatic black	3 m	0.70
19119ASL	Antistatic black	6 m	0.70

These profiles are applicable to code 19097 - 19097L

cod. 19070 - 19071



cod. 19072 - 19073





Chain guide wear strip

Accessories for aluminium profile



New

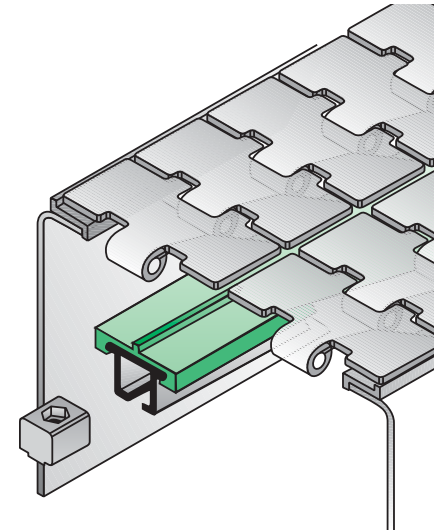

FIXING CLAMP



Material: reinforced polyamide.

Packaging: 100 pieces.

Application: rapid wear strip assembly with screws M6 or M5.

Notes: screw are not included.

Code	A mm	B mm	C mm	Screws
14084	10	6.2	4.5	M6
14085	8	5.2	4	M5

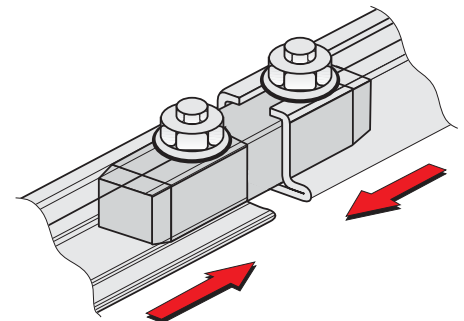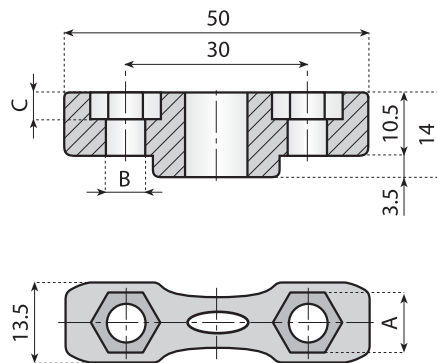

CONNECTING ELEMENT

Material: reinforced polyamide.

Packaging: 100 pieces.

Notes: screws are not included.

Code	A mm	B mm	C mm	Screw
14082	10	6.2	4.5	M6
14083	8	5.2	4	M5

Chain guide wear strip



Accessories for aluminium profile



WEAR STRIP SHOE

Application: shoes are used to help chain guide between idler wheels and wear strip and must be fixed with M6 screws.

New

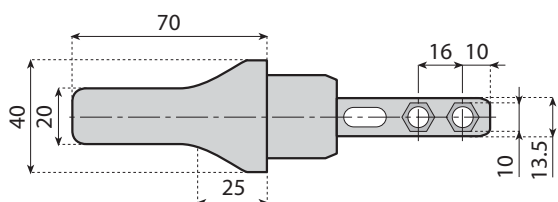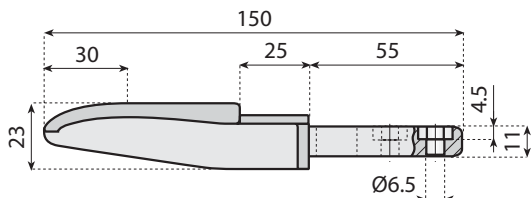



WEAR STRIP SHOE

Material: polyamide.

Packaging: 50 pieces.

Application: with chain L 82,5 - K325.

Code	Colour
14080	Black
14080V	Green

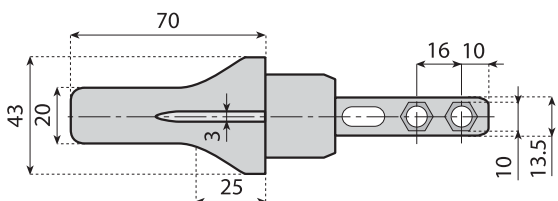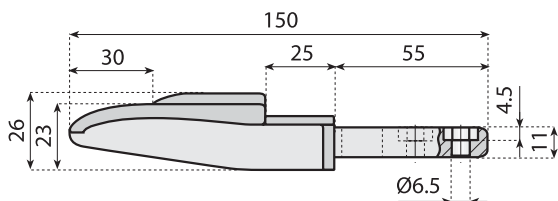

WEAR STRIP SHOE




Material: polyamide.

Packaging: 50 pieces.


Application: with chain L 82,5 - K325 distance 88 mm.

Code	Colour
14081	Black
14081V	Green

APPLICATION EXAMPLE

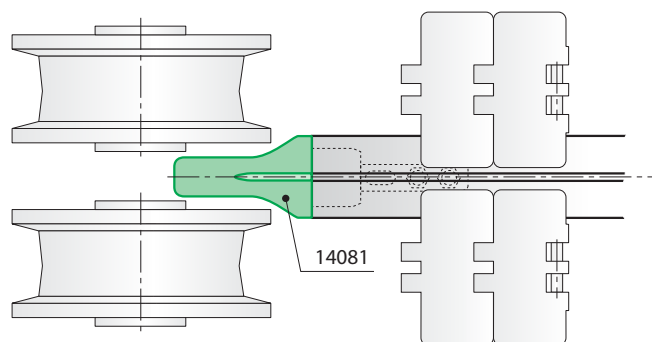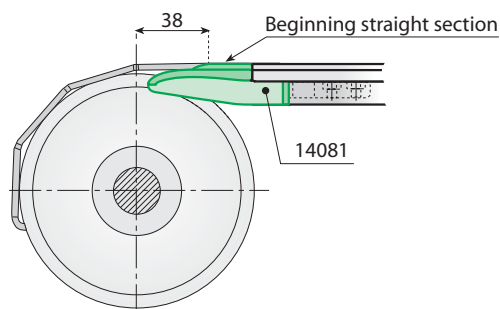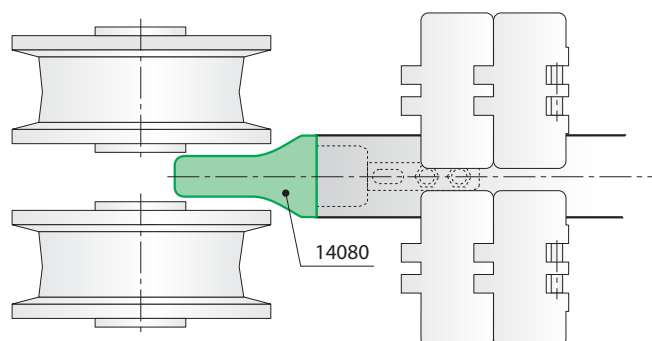

Chain guide wear strip

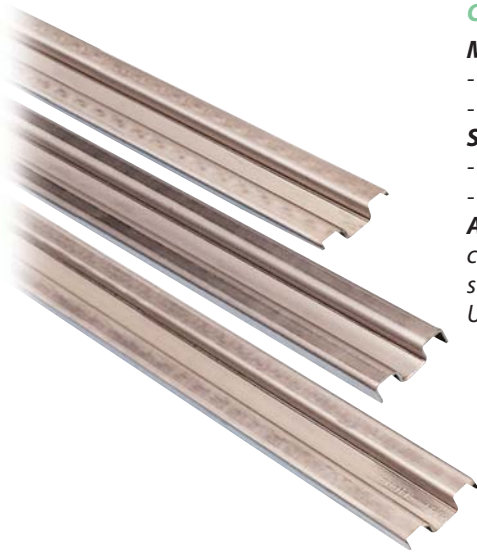

CHAIN GUIDE WEAR STRIP


Material:

- Metal profile in stainless steel AISI 304.
- Wear strip in UHMWPE.


Supply:

- 3 or 6 meters.
- Steel profile and wear strip are supplied assembled.

Application: the profile can be used on several conveyors as a side guide or as a chain support in combination with standard UHMWPE guides or wear strip.

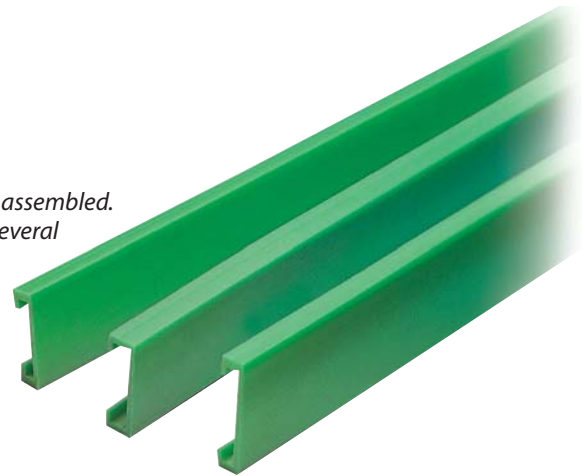



304 Stainless steel Polyethylene

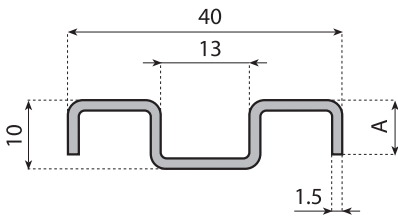

Code	A	Length	Weight Kg/m
19077	6	3 m	0.74
19077L	6	6 m	0.74
19078	8	3 m	0.78
19078L	8	6 m	0.78
19079	10	3 m	0.82
19079L	10	6 m	0.82

M-PROFILE

Supply: 3 or 6 meters.
Packaging: 30 meters.

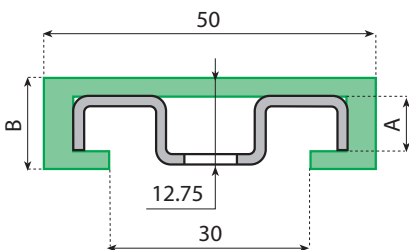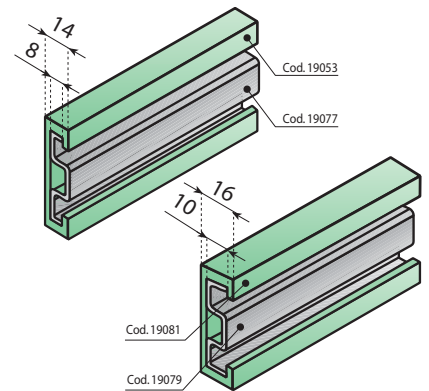

Code	Colour	A	B	Length	Weight kg/m
190240N	Black	6.5	12	3 m	0.97
190240NL	Black	6.5	12	6 m	0.97
190240V	Green	6.5	12	3 m	0.97
190240VL	Green	6.5	12	6 m	0.97
190241N	Black	8.5	14	3 m	1.03
190241NL	Black	8.5	14	6 m	1.03
190241V	Green	8.5	14	3 m	1.03
190241VL	Green	8.5	14	6 m	1.03
190242N	Black	10.5	16	3 m	1.09
190242NL	Black	10.5	16	6 m	1.09
190242V	Green	10.5	16	3 m	1.09
190242VL	Green	10.5	16	6 m	1.09

M-PROFILE WEAR STRIP

Supply: 3 or 6 meters.
Packaging: 30 meters.
Notes: the steel profile and wear strip are supplied assembled.

